



产品目录

Product Catalog

广州市皓腾灯光有限公司
Guangzhou Haoteng Lighting Co., Ltd

香港艾帝爾實業有限公司
Idealight Industrial Co., Limited



广州市皓腾灯光有限公司
Idealight Industrial Co., Limited



公司简介 > Company Profile

Idealight Industrial Co., Limited is a professional manufacturer with superb R & D capacity who was founded in 2006. All of our sales are trained and professional on stage lighting knowledge. Most of our engineers have been worked in stage lighting industry for more than 10years who can make sure to satisfy our customers' special requirements on our products. Until now, we can provide our customers with all kinds of Moving head, indoor and outdoor LED light, Follow Spot, DMX Controller and so on.

In a word, just like our brand name "Idealight" says, "Do your idea light! What idea you have, what light we have. That's it!"

"广州市皓腾灯光有限公司"是一家专业研发、生产适用于各类中档、中高档舞台、歌舞剧院、电视演播厅、多功能会议厅、演艺广场、机关大礼堂、娱乐城、DISCO夜总会、酒吧、慢摇吧、迪斯科、卡拉OK、家庭Party等娱乐场所的配套舞台设备的厂家。主要产品有：电脑摇头灯、室内外LED系列产品、电脑追光灯等。

产品通过ISO9001质量管理体系认证、欧洲的CE、ROHS认证，力求"造一流产品，创知名品牌"。



目录 >

Contents

摇头灯系列/Moving Head Light Series	1-4
LED摇头柔光灯系列/LED Moving Head Wash Light Series.....	5-9
LED摇头图案灯系列/LED Moving Head Spot Light Series.....	10-12
LED帕灯系列/LED Par Light Series.....	13-20
LED洗墙灯系列/LED Wall Wash Light Series.....	21-24
LED效果灯/LED Effect Light Series.....	25-27
追光灯系列/Follow Spot Light Series.....	28-30
控台系列/Controllers.....	31-32

摇头灯系列/Moving Head Light Series



HT-330BSW

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 500W
3. Lamp: PHILIPS MSD 15R (8000K, 1500Hours), Electronic Ballast
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 40°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 17CH/25CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 270degree (16bit)
11. Color Wheel: 14 colors + open, with rainbow effect
12. Gobo Wheel: 17gobo + open, with gobo flow effect Rotation Gobo Wheel: 8 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-facet prism, zoom
14. Product Size: 523*337*570mm
15. Net Weight: 18.5kg

- 1.电压：AC110-240V/50-60HZ
- 2.消耗功率：500W
- 3.灯泡：PHILIPS MSD 15R (7500K色温，1500小时)
- 4.透镜：3片透镜式镜头组
- 5.光束角度：0°- 40°
- 6.运行方式：DMX，主副机，自走
- 7.DMX 512控制通道：17通道/25通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度：540degree (16bit)
- 10.垂直角度：270degree (16bit)
- 11.颜色盘：14种颜色+白光，带彩虹效果和半色效果
- 12.图案盘：17种图案+4个白光，带图案流水和图案抖动效果
旋转图案盘：8种图案+4个白光，带图案流水和图案抖动效果
- 13.功能：频闪(1-13次/秒)，雾化(0%-100%)，调焦，可自转八棱镜，光圈
- 14.产品尺寸：523*337*570mm
- 15.净重：18.5kg



HT-330Beam

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 500W
3. Lamp: PHILIPS MSD 15R (7500K, 1500Hours), Electronic Ballast
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 15CH/17CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 270degree (16bit)
11. Color Wheel: 14 colors + open, with rainbow effect
12. Rotation Gobo Wheel: 8 gobo (with gobo flow and gobo shaking) + 4 aperture
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 3-facet prism, prism zoom
14. Product Size: 405*330*475mm
15. Net Weight: 18kg

- 1.电压：AC110-240V/50-60HZ
- 2.消耗功率：500W
- 3.灯泡：PHILIPS MSD 15R (7500K色温，1500小时)
- 4.透镜：3片透镜式镜头组
- 5.光束角度：0°- 3.9°
- 6.运行方式：DMX，主副机，自走
- 7.DMX 512控制通道：15通道/17通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度：540degree (16bit)
- 10.垂直角度：270degree (16bit)
- 11.颜色盘：14种颜色+白光，带彩虹效果和半色效果
- 12.旋转图案盘：8种图案+4个白光，带图案流水和图案抖动效果
- 13.功能：频闪(1-13次/秒)，雾化(0%-100%)，调焦，可自转三棱镜，可自转八棱镜，棱镜调焦
- 14.产品尺寸：405*330*475mm
- 15.净重：18kg



HT-280BSW

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Lamp: OSRAM HRI 280W (8000K, 2000Hours), Electronic Ballast
3. Power consumption: 400W
4. Lens: high precision optical lens group
5. Zoom: parallel beam angel 2.5 - 20 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS/24CHS
8. Pan/Tilt: 540degree/270degree, automatically accurate positioning
9. Color Wheel: 13 color + open, with rainbow effect
10. Gobo Wheel 1: 14 gobo + open, with gobo flow and gobo shaking Rotation Gobo Wheel 2: 9 bidirectional & indexable gobo + open, with gobo flow and gobo shaking
11. Prism 1: 8-facet circular prism rotation in both directions at different speeds Prism 2: 6-facet linear prism rotation in both directions at different speeds
12. Focus: linear adjustment
13. Wash effect: adjustable Wash effects angle
14. Dimmer: 0-100% linear adjustment
15. Strobe: Double lens strobe (0.5-9 times/ second)
16. Product Size: 386x365x589mm
17. Net Weight: 19KG

1. 电压: AC110~240V/50-60HZ
2. 灯泡: OSRAM HRI 280W (8000K, 2000Hours), 原装电子镇流器
3. 消耗功率: 400W
4. 透镜: 高精度光学镜头组
5. 光圈: 光圈大小可调, 光束角度2.5 - 20度
6. 运行模式: DMX512, 主副机, 自走
7. DMX512通道: 16CHS/24CHS
8. X轴/Y轴: 540度/270度, 自带纠错功能
9. 颜色盘: 13种颜色 + 白光, 带颜色流水效果
10. 图案盘1: 14种图案 + 白光, 带图案流水和图案抖动效果 旋转图案盘2: 9种双向可索引图案片 + 白光, 带图案流水, 图案抖动和图案旋转效果
11. 棱镜盘1: 双向可旋转8棱镜, 旋转速度可调 棱镜盘2: 双向可旋转6棱镜斜纹镜, 旋转速度可调
12. 调焦: 线性调焦
13. 雾化: 雾化角度可调
14. 调光: 0-100%线性调光
15. 频闪: 双面频闪 (0.5-9 次/秒)
16. 产品尺寸: 386x365x589mm
17. 净重: 19KG



HT-280Beam

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 400W
3. Lamp: OSRAM HRI 280W (8000K, 2000Hours), Electronic Ballast
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0° - 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 16CH/20CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 280degree (16bit)
11. Color Wheel: 14 colors + open, with rainbow effect
12. Gobo Wheel: 17 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-face prism.
14. Product Size: 405*330*475mm
15. Net Weight: 18kg

1. 电压: AC110-240V/50-60HZ
2. 消耗功率: 400W
3. 灯泡: OSRAM HRI 280W (8000K色温, 2000小时)
4. 透镜: 3片透镜式镜头组
5. 光束角度: 0° - 3.9°
6. 运行方式: DMX, 主副机, 自走
7. DMX 512控制通道: 16通道/20通道
8. 高档蓝白光液晶显示屏
9. 水平角度: 540degree (16bit)
10. 垂直角度: 280degree (16bit)
11. 颜色盘: 14种颜色+白光, 带彩虹效果和半色效果
12. 图案盘: 17种图案+白光, 带图案流水和图案抖动效果
13. 功能: 频闪(1-13次/秒), 雾化(0%-100%), 调焦, 可自转八棱镜
14. 产品尺寸: 405*330*475mm
15. 净重: 18kg



HT-230Beam

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 350W
3. Lamp: OSRAM SIRIUS HRI 230W (8000K, 2500hours)
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 16CH/20CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 280degree (16bit)
11. Color Wheel: 14 colors + open, with rainbow effect
12. Gobo Wheel: 17 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-face prism.
14. Product Size: 405*330*475mm
15. Net Weight: 18kg

- 1.电压：AC110-240V/50-60HZ
- 2.消耗功率：350W
- 3.灯泡：OSRAM SIRIUS HRI 230W (8000K色温，2500小时)
- 4.透镜：3片透镜式镜头组
- 5.光束角度：0°- 3.9°
- 6.运行方式：DMX. 主副机，自走
- 7.DMX 512控制通道：16通道/20通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度：540degree (16bit)
- 10.垂直角度：280degree (16bit)
- 11.颜色盘：14种颜色+白光，带彩虹效果和半色效果
- 12.图案盘：17种图案+白光，带图案流水和图案抖动效果
- 13.功能：频闪(1-13次/秒)，雾化(0%-100%)，调焦，可自转八棱镜
- 14.产品尺寸：405*330*475mm
- 15.净重：18kg



HT-200Beam

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 280W
3. Lamp: Philips MSD Platinum 5R (8000K, 2000hours)
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 16CH/20CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 280degree (16bit)
11. Color Wheel: 14 colors + open, with rainbow effect
12. Gobo Wheel: 17 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-face prism.
14. Product Size: 405*330*475mm
15. Net Weight: 18kg

- 1.电压：AC110-240V/50-60HZ
- 2.消耗功率：280W
- 3.灯泡：Philips MSD Platinum 5R (8000K色温，2000小时)
- 4.透镜：3片透镜式镜头组
- 5.光束角度：0°- 3.9°
- 6.运行方式：DMX. 主副机，自走
- 7.DMX 512控制通道：16通道/20通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度：540degree (16bit)
- 10.垂直角度：280degree (16bit)
- 11.颜色盘：14种颜色+白光，带彩虹效果和半色效果
- 12.图案盘：17种图案+白光，带图案流水和图案抖动效果
- 13.功能：频闪(1-13次/秒)，雾化(0%-100%)，调焦，可自转八棱镜
- 14.产品尺寸：405*330*475mm
- 15.净重：18kg



HT-120BeamT

灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 400W
3. Lamp: Philips 2R lamp X 2PCS (8000K, 2000hours)
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 25CH/28CH/38CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 280degree (16bit)
11. Color Wheel: 13 colors + open, with rainbow effect
12. Gobo Wheel: 14 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-face prism, each head can be controlled seperately
14. Packing Size: 540*490*420mm
15. Gross Weight: 20kg

- 1.电压 : AC110-240V/50-60HZ
- 2.消耗功率 : 400W
- 3.灯泡 : Philips 2R lamp X 2PCS (8000K色温 , 2000小时)
- 4.透镜 : 3片透镜式镜头组
- 5.光束角度 : 0°- 3.9°
- 6.运行方式 : DMX. 主副机 , 自走
- 7.DMX 512控制通道: 25通道/28通道/38通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度: 540degree (16bit)
- 10.垂直角度: 280degree (16bit)
- 11.颜色盘: 13种颜色+白光, 带彩虹效果和半色效果
- 12.图案盘: 14种图案+白光, 带图案流水和图案抖动效果
- 13.功能: 频闪(1-13次/秒), 雾化(0%-100%),调焦, 可自转八棱镜, 两头可单独控制
- 14.包装尺寸: 540*490*420mm
- 15.毛重 : 20kg



HT-120Beam


灯光效果/Effect



1. Voltage: AC110-240V/50-60HZ
2. Power consumption: 220W
3. Lamp: Philips 2R lamp (8000K, 2000hours)
4. Lens: 3-lens HQ optical group
5. Beam Angle: 0°- 3.9°
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 16CH
8. Blue LCD Display
9. Pan: 540degree (16bit)
10. Tilt: 280degree (16bit)
11. Color Wheel: 13 colors + open, with rainbow effect
12. Gobo Wheel: 13 gobo (with gobo flow and gobo shaking) + open
13. Functions: Strobe (1-13times/s), Frost (0%-100%), Focus, Rotation 8-face prism.
14. Packing Size: 400*360*470mm
15. Gross Weight: 17kg


- 1.电压 : AC110-240V/50-60HZ
- 2.消耗功率 : 220W
- 3.灯泡 : Philips 2R lamp (8000K色温 , 2000小时)
- 4.透镜 : 3片透镜式镜头组
- 5.光束角度 : 0°- 3.9°
- 6.运行方式 : DMX. 主副机 , 自走
- 7.DMX 512控制通道: 16通道
- 8.高档蓝白光液晶显示屏
- 9.水平角度: 540degree (16bit)
- 10.垂直角度: 280degree (16bit)
- 11.颜色盘: 13种颜色+白光, 带彩虹效果和半色效果
- 12.图案盘: 13种图案+白光, 带图案流水和图案抖动效果
- 13.功能: 频闪(1-13次/秒), 雾化(0%-100%),调焦, 可自转八棱镜
- 14.包装尺寸: 400*360*470mm
- 15.毛重 : 17kg

LED摇头柔光灯系列/LED Moving Head Wash Light Series

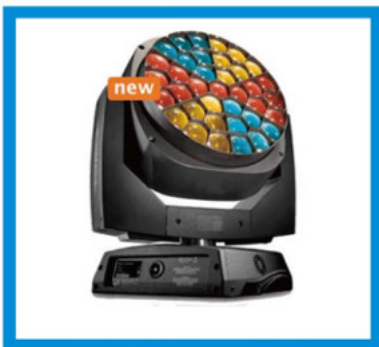

HT-LM-37BEE

灯光效果/Effect

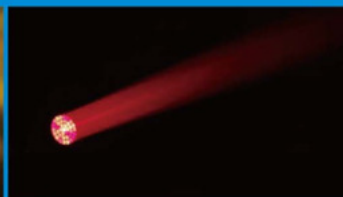

1. Power Supply: AC100-240V, 50-60Hz
2. Power Consumption: 600W
3. Light Source: 37pcs*15W 4in1 RGBW high brightness leds
4. PAN: 540 degree with 16bit rotate
5. Tilt: 270 degree with 16bit rotate
6. Dimmer: 0-100% linear dimming system
7. Strobe: High speed electronic strobe reaches 1-25 times/second and pulse effect
8. ZOOM: 3 ZOOM motors work together with the same step
9. Operation Mode: DMX512, Master/slave, Auto, Sound
10. DMX Channel: 18 DMX Channels
11. Effect: LED board plate can rotate continuously 360degree to make amazing effect with speed adjustable
Built-in 51 static effects and 51 dynamic effects, multiple built-in programs
Front Lens Bi-directional Rotation unique design to get an amazing effects.
Preset program: 8 built in programs can be called up via DMX controller
12. Product Size: 400*330*470mm
13. Net Weight: 10.5kg

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 600W
3. 灯珠: 37颗15W 红绿蓝白四合一高亮度灯珠
4. X轴: 540度
5. Y轴: 270度
6. 调光: 0-100%线性调光
7. 频闪: 高速电子频闪0-25次/秒
8. 调焦: 3个调焦电机, 确保调焦平稳快速
9. 运行模式: DMX512, 主副机, 自走, 音控
10. DMX通道: 18CH
11. 特殊效果:
LED板可连续旋转360度, 镜头的双向旋转的独特设计达到惊人的效果, 旋转速度可调
51种内置静态效应和51种内置动态效应, 多种内置程序
8种内置程序
12. 产品尺寸: 400*330*470mm
13. 净重: 10.5kg



HT-LM-19BEE

灯光效果/Effect



1. Power Supply: AC100-240V, 50-60Hz
2. Power Consumption: 300W
3. Light Source: 19pcs*15W 4in1 RGBW high brightness Osram leds
4. PAN: 540 degree with 16bit rotate
5. Tilt: 270 degree with 16bit rotate
6. Dimmer: 0-100% linear dimming system
7. Strobe: High speed electronic strobe reaches 1-25 times/second and pulse effect
8. ZOOM: 3 ZOOM motors work together with the same step
9. Operation Mode: DMX512, Master/slave, Auto, Sound
10. DMX Channel: 18 DMX Channels
11. Effect:
LED board plate can rotate continuously 360degree to make amazing effect with speed adjustable
Built-in 51 static effects and 51 dynamic effects, multiple built-in programs
Front Lens Bi-directional Rotation unique design to get an amazing effects.
Preset program: 8 built in programs can be called up via DMX controller
12. Product Size: 300*230*370mm
13. Net Weight: 8kg

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 300W
3. 灯珠: 19颗15W 红绿蓝白四合一高亮度灯珠
4. X轴: 540度
5. Y轴: 270度
6. 调光: 0-100%线性调光
7. 频闪: 高速电子频闪0-25次/秒
8. 调焦: 3个调焦电机, 确保调焦平稳快速
9. 运行模式: DMX512, 主副机, 自走, 音控
10. DMX通道: 18CH
11. 特殊效果:
LED板可连续旋转360度, 镜头的双向旋转的独特设计达到惊人的效果, 旋转速度可调
51种内置静态效应和51种内置动态效应, 多种内置程序
8种内置程序
12. 产品尺寸: 300*230*370mm
13. 净重: 8kg



HT-LM-2510M

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 400W
3. Light source: 25pcs 12W RGBW 4IN1, average life 50,000Hours
4. DMX Channel: 19CH/29CH/117CH
5. Control: DMX/Master-slave/Auto/Sound activated
6. Pan: Unlimited+16 bit fine
7. Tilt: Unlimited+16 bit fine
8. Beam Angle: 7
9. Dimmer: 0-100% linear dimming
10. Strobe: 0-25Hz
11. Packing size: 400*510*560mm
12. G.W.: 15.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 400W
3. 灯珠: 25颗12W红绿蓝白四合一灯珠, 平均寿命50000小时
4. DMX通道: 19CH/29CH/117CH
5. 运行模式: DMX/主副机/自走/音控
6. X轴: 无极旋转+16位微调
7. Y轴: 无极旋转+16位微调
8. 光束角度: 7度
9. 调光: 0-100%线性调光
10. 频闪: 0-25Hz
11. 包装尺寸: 400*510*560mm
12. 毛重: 15.5KG



HT-LM-910M

1. Voltage: AC100-240V, 50-60HZ
2. Power consumption: 100W
3. LED: 9pcs 10w CREE led, RGBW 4in1
4. Operation Mode: DMX, Master/Slave, Auto, Sound
5. DMX Channel: 1/10/15/17/48CH
6. Strobe: 1-25Hz
7. Dimming: linear dimming
8. Pan: 540 degree / Tilt: 270 degree
9. Beam Angle: 10degree
10. Function: seven color beam, each led can be controlled individually
11. Packing size: 330*260*470mm
12. G.W: 6.5KG

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 100W
3. 灯珠: 9颗10W红绿蓝白四合一灯珠
4. 运行模式: DMX/主副机/自走/音控
5. DMX通道: 1CH/10CH/15CH/17CH/48CH
6. 频闪: 0-25Hz
7. 调光: 0-100%线性调光
8. X轴: 540度/ Y轴: 270度
9. 光束角度: 10度
10. 功能: 7色光束效果, 每颗灯珠可以单独控制
11. 包装尺寸: 330*260*470mm
12. 毛重: 6.5KG



HT-LM-1915BZ

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 300W
3. LED: 19PCS 15w RGBW 4IN1 leds
4. Beam Angle: 8-60degree
5. Strobe: 1-20times/second
6. DMX channel: 14CH
7. Operation Mode: DMX, Master/slave, Auto
8. Pan: 540degree (16bit)
9. Tilt: 270degree (16bit)
10. Packing size: 270*420*495mm
11. G,W: 9.5KG
- P.S: Group control optional

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 300W
3. 灯珠: 19颗15W红绿蓝白四合一灯珠
4. 光束角度: 8-60度
5. 频闪: 1-20次/秒
6. DMX通道: 14CH
7. 运行模式: DMX/主副机/自走
8. X轴: 540度
9. Y轴: 540度
10. 包装尺寸: 270*420*495mm
11. 毛重: 9.5KG
- 注: 圈控效果可定制。



HT-LM-715BZ

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 120W
3. LED: 7PCS 15w RGBW 4IN1 leds
4. Beam Angle: 8-60degree
5. Strobe: 1-20times/second
6. DMX channel: 12CH/16CH
7. Operation Mode: DMX, Master/slave, Auto
8. Pan: 540degree (16bit)
9. Tilt: 270degree (16bit)
10. Packing size: 530*340*360mm
11. G,W: 6.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 120W
3. 灯珠: 7颗15W红绿蓝白四合一灯珠
4. 光束角度: 8-60度
5. 频闪: 1-20次/秒
6. DMX通道: 12CH/16CH
7. 运行模式: DMX/主副机/自走
8. X轴: 540度
9. Y轴: 540度
10. 包装尺寸: 530*340*360mm
11. 毛重: 6.5KG



HT-LM-1915B



1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 300W
3. LED: 19PCS 15w RGBW 4IN1 leds
4. Beam Angle: 8degree
5. Strobe : 1-20times/second
6. DMX channel: 15CH
7. Operation Mode: DMX, Master/slave, Auto
8. Pan: 540degree (16bit)
9. Tilt: 270degree (16bit)
10. Packing size: 445*310*435mm
11. G,W: 12KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 300W
3. 灯珠: 19颗15W红绿蓝白四合一灯珠
4. 光束角度: 8度
5. 频闪: 1-20次/秒
6. DMX通道: 15CH
7. 运行模式: DMX/主副机/自走
8. X轴: 540度
9. Y轴: 540度
10. 包装尺寸: 445*310*435mm
11. 毛重: 12KG



HT-LM-3610QZ

灯光效果/Effect

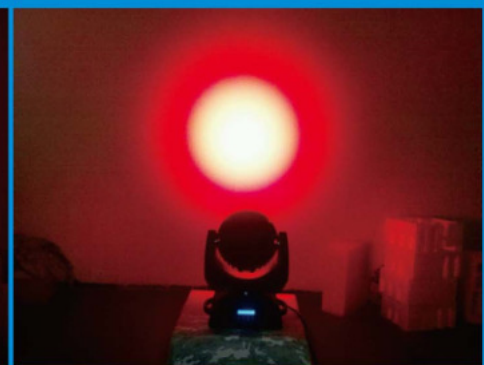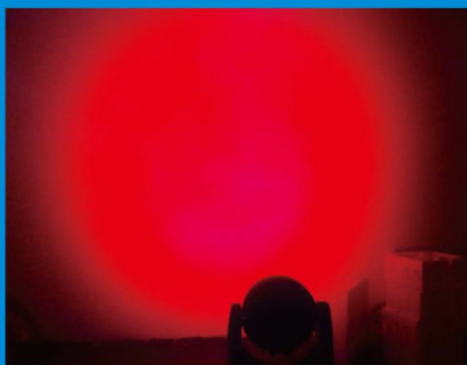

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 400W
3. LED: 36pcs 10W Quad-RGBW LED, high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 15-55degree
5. Operation Mode: DMX, Master/slave, Auto, Sound activation
6. DMX 512 control channel: 16CH
7. Blue LCD Display
8. Pan: 540degree
9. Tilt: 265degree
10. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
11. Packing Size: 445*310*435mm
12. G. W: 11KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 400W
3. LED: 36颗10W红绿蓝白4合1的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15°到55°自由调节
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 16通道
7. 高档蓝白液晶显示屏
8. 水平扫描: 540°
9. 垂直扫描: 265°
10. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
11. 包装尺寸: 445*310*435mm
12. 毛重: 11KG



HT-LM-1210F

1. Voltage: AC100-240V, 50-60HZ
2. Power consumption: 145W
3. LED: 12pcs 10w CREE led, RGBW 4 in 1
4. DMX Channel: 18CH
5. Strobe: 1-25Hz
6. Dimming: linear dimming
7. Pan: 540 degree
8. Tilt: 270 degree
9. Function: seven color beam, flower effect. etc many amazing effects.
10. Carton packing size: 330*260*470mm
11. N.W: 5.5KG
12. G.W: 6.5KG

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 145W
3. 灯珠: 12颗10w CREE灯珠, 红绿蓝白四合一
4. DMX通道: 18CH
5. 频闪: 1-25Hz
6. 调光: 线性调光
7. X轴: 540度
8. Y轴: 270度
9. 功能: 七色光束, 万花筒开花效果等
10. 包装尺寸: 330*260*470mm
11. 净重: 5.5KG
12. 毛重: 6.5KG



HT-LM-310BT

1. Voltage: AC100-240V, 50-60HZ
2. Power consumption: 120W
3. LED: 6pcs 10w CREE led, R2G2B2
4. DMX Channel: 14CH/20CH
5. Strobe: 1-25Hz
6. Dimming: linear dimming
7. Pan & Tilt unlimited and infinite rotation
8. Function: Double face shooting beam
9. Carton packing size: 260*233*430mm
10. N.W: 5.5KG
11. G.W: 6.5KG

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 120W
3. 灯珠: 6颗10w CREE灯珠, 红绿蓝各2颗
4. DMX通道: 14CH/20CH
5. 频闪: 1-25Hz
6. 调光: 线性调光
7. X轴Y轴无极旋转
8. 功能: 双头光束
9. 包装尺寸: 260*233*430mm
10. 净重: 5.5KG
11. 毛重: 6.5KG



HT-LM-363B

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 120W
3. LED: 36*3W LEDs (12Red,12Green,12Blue), high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 8degree
5. Operation Mode: DMX, Master/slave, Sound activation, Auto
6. DMX 512 control channel: 9CH/12CH
7. Dimmer: 0-100%
8. Functions: Color mixing, Color change, Color fade, Strobe
9. Packing Size: 410x380x280mm
10. G. W: 8KG

1. 电压: AC100-240V, 50Hz/60Hz
2. 最大消耗功率: 120W
3. 光源: 36颗3w灯珠
4. 光束角度: 8°
5. 运行模式: DMX, 主副机, 自走, 音控
6. DMX通道: 9CH/12CH
7. 调光: 0-100%
8. 其他功能: 混色, 换色, 渐变, 频闪
9. 包装尺寸: 410*380*280mm
10. 毛重: 8KG



HT-LM-710B

1. Voltage: AC100-240V, 50Hz/60Hz
2. Max Power Consumption: 120W
3. LED: 7PCS 15w OSRAM 4IN1 leds
4. Beam Angle: 8degree
5. Strobe: 1-20times/second
6. DMX channel: 9CH/14CH/16CH/28CH
7. Operation Mode: DMX, Master/slave, Auto, Sound activation
8. Pan: 540degree (16bit)
9. Tilt: 270degree (16bit)
10. Packing size: 530*340*360mm
11. N.W: 4.7KG
- G.W: 5.7KG

1. 电压: AC100-240V, 50Hz/60Hz
2. 最大消耗功率: 120W
3. 光源: 7颗15w进口OSRAM四合一灯珠
4. 光束角度: 8°
5. 频闪: 1-20次/秒
6. DMX通道: 9CH/14CH/16CH/28CH
7. 运行模式: DMX, 主副机, 自走, 音控
8. 水平: 540° (16位)
9. 垂直: 270度 (16位)
10. 包装尺寸: 530*340*360mm
11. 净重: 4.7KG
- 毛重: 5.7KG



HT-LM-1210B

1. Voltage: AC100-240V, 50Hz/60Hz
2. Max Power Consumption: 140W
3. LED: 12PCS 10w CREE 4IN1 leds
4. Beam Angle: 20degree
5. Strobe: 1-20times/second
6. DMX channel: 12CH
7. Operation Mode: DMX, Master/slave, Auto, Sound activation
8. Pan: 540degree (16bit)
9. Tilt: 270degree (16bit)
10. Product size: 310*260*150mm
Packing size: 530*340*360mm
11. N.W: 4.7KG
G.W: 5.7KG

1. 电压: AC100-240V, 50Hz/60Hz
2. 最大消耗功率: 140W
3. 光源: 12颗10w进口CREE四合一灯珠
4. 光束角度: 20°
5. 频闪: 1-20次/秒
6. DMX通道: 12CH
7. 运行模式: DMX, 主副机, 自走, 音控
8. 水平: 540° (16位)
9. 垂直: 270度 (16位)
10. 产品尺寸: 310*260*150mm
包装尺寸: 530*340*360mm
11. 净重: 4.7KG
毛重: 5.7KG



HT-LM-8102W

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 80W
3. LED: 8pcs 10W single color LEDs, high brightness with an average lifetime as 50,000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 7CH/13CH
6. Packing Size: 665*270*280mm
7. G.W: 8.5kg

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 80W
3. 灯珠: 8颗10W高亮度单白光灯珠, 平均寿命50000小时
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX通道: 7CH/13CH
6. 包装尺寸: 665*270*280mm
7. 毛重: 8.5kg



HT-LM-8102C

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 80W
3. LED: 8pcs 10W RGBW 4IN1 LEDs, high brightness with an average lifetime as 50,000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 11CH/39CH
6. Packing Size: 665*270*280mm
7. G.W: 8.5kg

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 80W
3. 灯珠: 8颗10W高亮度红绿蓝白四合一灯珠, 平均寿命50000小时
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX通道: 11CH/39CH
6. 包装尺寸: 665*270*280mm
7. 毛重: 8.5kg



HT-LM-10B

1. Voltage: AC100-240V, 50-60HZ
2. Power consumption: 20W
3. LED: 1 x 10w LED
4. DMX Channel: 7CH/9CH
5. Strobe: 1-25Hz
6. Dimming: linear dimming
7. Pan: 540degree
8. Tilt: 270degree


1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 20W
3. 灯珠: 1颗10w灯珠
4. DMX通道: 7CH/9CH
5. 频闪: 1-25Hz
6. 调光: 线性调光
7. X轴: 540度
8. Y轴: 270度

LED摇头图案灯系列/LED Moving Head Spot Light Series



HT-LM-180SW

灯光效果/Effect

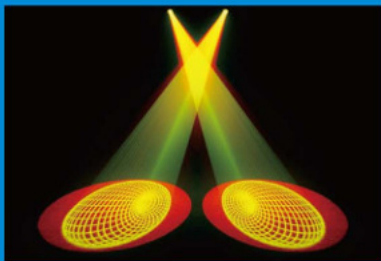

180W LED Moving Spot + 12*9W LED Moving Wash 180WLED图案灯+12*9WLED柔光灯二合一

1. Voltage: AC110-120V,220-240V,50/60HZ
2. Power Consumption: 320W
3. LED Spot source: Ultra bright LED 180W
4. LED Wash source: 12pcs 9W RGB 3IN1 LEDs
5. Operation Mode: DMX, Master/slave, Auto, Sound
6. DMX 512 Channels: 14/18/32CH
7. Blue LCD display
8. Pan: 540degree
9. Tilt: 270degree
10. LED Spot Beam Angle: 15degree
11. LED Wash Beam Angle: 25/45degree
12. Color wheel: 7colors + open, with Rainbow effect
13. Gobo wheel1: 7gobos+ open, with Gobo shaking
Gobo wheel2: 7gobos+ open, with Gobo rotation
14. Functions: Dimmer, Strobe, Focus, Iris, 3-facet prism, Prism rotation
15. product size: 580*355*420mm
16. Packing size: 670*415*480mm
17. N.W: 16kg
18. G.W: 18kg

1. 电压: AC110-120V,220-240V,50/60HZ
2. 消耗功率: 320W
3. LED图案灯光源: 高亮度180W白色灯珠
4. LED柔光灯光源: 12颗 9W 红绿蓝三合一灯珠
5. 运行模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 14/18/32CH
7. 蓝色LCD液晶屏
8. 水平: 540°
9. 垂直: 270°
10. LED图案灯光束角度: 15°
11. LED柔灯光束角度: 25°/ 45°
12. 颜色盘: 7种颜色 + 白光, 带彩虹效果
13. 图案盘1: 7种图案 + 白光, 带图案抖动
图案盘2: 7种图案 + 白光, 带图案旋转
14. 其他功能: 调光, 频闪, 调焦, 光圈, 三棱镜, 棱镜自转
15. 产品尺寸: 580*355*420mm
包装尺寸: 670*415*480mm
16. 净重: 16kg
毛重: 18kg



HT-LM-200SW

灯光效果/Effect



200W LED Moving Spot + 16*10W LED Moving Wash 200WLED图案灯+16*10WLED柔光灯二合一

1. Voltage: AC110-120V,220-240V,50/60HZ
2. Power Consumption: 400W
3. LED Spot source: Ultra bright LED 200W
4. LED Wash source: 16pcs 10W RGBW 4IN1 LEDs
5. Operation Mode: DMX, Master/slave, Auto, Sound
6. DMX 512 Channels: 20/32/39CH
7. Blue LCD display
8. Pan: 540degree
9. Tilt: 270degree
10. LED Spot Beam Angle: 15degree
11. LED Wash Beam Angle: 25/45degree
12. Color wheel: 7colors+ open, with Rainbow effect
13. Gobo wheel1: 7gobos+ open, with gobo shaking
Gobo wheel2: 7gobos+ open, with gobo rotation
14. Function: Dimmer, Strobe, Focus, Iris, 3-facet prism, prism rotation
15. Product size: 450*335*680mm
16. Packing size: 460*450*725mm
17. N.W: 21kg
18. G.W: 23.5kg

1. 电压: AC110-120V,220-240V,50/60HZ
2. 消耗功率: 400W
3. LED图案灯光源: 高亮度200W白色灯珠
4. LED柔光灯光源: 16颗 10W 红绿蓝白四合一灯珠
5. 运行模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 20/32/39CH
7. 蓝色LCD液晶屏
8. 水平: 540°
9. 垂直: 270°
10. LED图案灯光束角度: 15°
11. LED柔灯光束角度: 25°/ 45°
12. 颜色盘: 7种颜色 + 白光, 带彩虹效果
13. 图案盘1: 7种图案 + 白光, 带图案抖动
图案盘2: 7种图案 + 白光, 带图案旋转
14. 其他功能: 调光, 频闪, 调焦, 光圈, 三棱镜, 棱镜自转
15. 产品尺寸: 450*335*680mm
包装尺寸: 460*450*725mm
16. 净重: 21kg
毛重: 23.5kg



HT-LM-100S

灯光效果/Effect



- 1.Voltage: AC100-240V,50-60HZ
- 2.Power Consumption: 200W
- 3.LED: 1*100W LED, high brightness with a average lifetime as 50,000hrs
- 4.Pan: 540Degree Tilt: 270Degree
- 5.Color Wheel: 7 colors + open, with Rainbow effect
- 6.Gobo Wheel 1: 9 gobo +open, with gobo flow effect
- Rotating Gobo Wheel 2: 7 gobo (with gobo rotating) +open
- 7.Operation Mode: DMX, Master/slave, Auto, Sound activation/LCD Display
- 8.DMX 512 control channel: 12CH/16CH
- 9.Dimmer:0-100%
- 10.Functions: Strobe(0-10HZ), Focus, 3-facet Prism, Prism Rotation, Gobo rotation
- 11.Packing size:645*390*450mm
- 12.G.W:16.5KG

- 1.电压: AC100-240V,50-60HZ
- 2.消耗功率: 200W
- 3.灯珠: 1颗100W高亮度白色灯珠, 平均寿命50000小时
- 4.X轴: 540度 Y轴: 270度
- 5.颜色盘: 7种颜色+白光, 带颜色流水效果
- 6.图案盘1: 9种图案+白光, 带图案流水效果
- 旋转图案2: 7种图案+白光, 带图案流水, 图案抖动和图案旋转效果
- 7.运行模式: DMX,主副机,自走,音控
- 8.DMX通道: 12CH/16CH
- 9.调光:0-100%线性调光
- 10.功能: 频闪(0-10HZ), 调焦, 棱镜, 棱镜旋转, 图案旋转
- 11.包装尺寸: 645*390*450mm
- 12.毛重:16.5KG



HT-LM-60S

灯光效果/Effect



- 1.Voltage: AC100-240V,50-60HZ
- 2.Power Consumption: 130W
- 3.LED: 1*60W LED, high brightness with a average lifetime as 50,000hrs
- 4.Pan: 540Degree Tilt: 270Degree
- 5.Color Wheel: 7 colors plus open, with Rainbow effect
- 6.Rotating Gobo Wheel 1: 7 gobo(with gobo rotating) + open
- 7.Operation Mode: DMX, Master/slave, Auto, Sound activation/LCD Display
- 8.DMX 512 control channel: 15CH
- 9.Dimmer:0-100%
- 10.Functions: Strobe(0-10HZ), Focus, Prism, Prism Rotation, Gobo rotation
- 11.Size:280x280x405mm
- 12.Weight:8.5KG

- 1.电压: AC100-240V,50-60HZ
- 2.消耗功率: 130W
- 3.灯珠: 1颗60W高亮度白色灯珠, 平均寿命50000小时
- 4.X轴: 540度 Y轴: 270度
- 5.颜色盘: 7种颜色+白光, 带颜色流水效果
- 6.旋转图案盘: 7种图案+白光, 带图案流水, 图案抖动和图案旋转效果
- 7.运行模式: DMX,主副机,自走,音控
- 8.DMX通道: 15CH
- 9.调光:0-100%线性调光
- 10.功能: 频闪(0-10HZ), 调焦, 棱镜, 棱镜旋转, 图案旋转
- 11.产品尺寸:280x280x405mm
- 12.净重:8.5KG



HT-LM-30S

灯光效果/Effect



1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 70W
3. LED: 1*30W White LED
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 channel: 10CH
6. Pan: 540 degree(16bit)
7. Tilt: 270 degree(16bit)
8. Color Wheel: 7 colors + open, with rainbow effect
9. Rotating Gobo Wheel: 6 gobo(with gobo shaking) + open
10. Functions: Dimmer(0-100%), Strobe (0-10times/s)
11. Lighting size: 275*275*305mm
12. Net Weight: 7.1KG

- 1.电压: AC100-240V,50-60HZ
- 2.消耗功率: 70W
- 3.灯珠: 1颗30W高亮度白色灯珠, 平均寿命50000小时
- 4.运行模式: DMX,主副机,自走,音控
- 5.DMX通道: 10CH
- 6.X轴: 540度
- 7.Y轴: 270度
- 8.颜色盘: 7种颜色+白光, 带颜色流水效果
- 9.旋转图案盘: 6种图案+白光, 带图案流水, 图案抖动和图案旋转效果
- 10.功能: 调光(0-100%线性调光),频闪(0-10HZ)
- 11.产品尺寸: 275*275*305mm
- 12.净重: 7.1KG



HT-LM-10S

灯光效果/Effect



1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 30W
3. LED: 1*10W CREE LED
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 channel: 9CH/11CH
6. Pan: 540 degree(16bit)
7. Tilt: 270 degree(16bit)
8. Color Wheel: 7 colors + open, with rainbow effect
9. Gobo Wheel: 7 gobo + open, with gobo flow and gobo shaking effect
10. Functions: Dimmer(0-100%), Strobe (0-10times/s), Manual Focus

- 1.电压: AC100-240V,50-60HZ
- 2.消耗功率: 30W
- 3.灯珠: 1颗10W高亮度白色灯珠, 平均寿命50000小时
- 4.运行模式: DMX,主副机,自走,音控
- 5.DMX通道: 9CH/11CH
- 6.X轴: 540度
- 7.Y轴: 270度
- 8.颜色盘: 7种颜色+白光, 带颜色流水效果
- 9.旋转图案盘: 7种图案+白光, 带图案流水和图案抖动效果
- 10.功能: 调光(0-100%线性调光),频闪(0-10HZ), 手动调焦

LED帕灯系列/LED Par Light Series

IP65



HT-LP-1410Z


灯光效果/Effect



1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 140W
3. LED: 14pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 10CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 290*290*345mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 140W
3. LED: 14颗10W红绿蓝白四合一大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 10通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 290*290*345mm
9. 毛重: 9.5KG

IP65

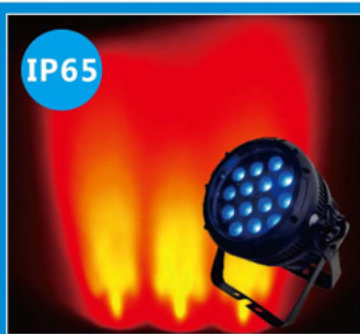

HT-LP-1415Z

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 210W
3. LED: 14pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 11CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 290*290*345mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 210W
3. LED: 14颗15W的红绿蓝白琥珀五合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 290*290*345mm
9. 毛重: 9.5KG

IP65



HT-LP-1418Z

灯光效果/Effect



1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 270W
3. LED: 14pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8°-45°
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 290*290*345mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 270W
3. LED: 14颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 290*290*345mm
9. 毛重: 9.5KG

IP65



HT-LP-1810Z

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 180W
3. LED: 18pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 10CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 180W
3. LED: 18颗10W红绿蓝白四合一大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 10通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-1815Z

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 270W
3. LED: 18pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 11CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 270W
3. LED: 18颗15W的红绿蓝白琥珀五合一大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-1818Z

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 350W
3. LED: 18pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8°-45°
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 350W
3. LED: 18颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8°-45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-1810

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 180W
3. LED: 18pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 15degree/25degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 8CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 180W
3. LED: 18颗10W红绿蓝白四合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15°/25°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 8通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-1815

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 270W
3. LED: 18pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 15degree/25degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 5CH/9CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 270W
3. LED: 18颗15W的红绿蓝白琥珀五合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15°/25°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 5通道/9通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-1818

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 350W
3. LED: 18pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 25degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 11CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 325*325*350mm
9. G. W: 9.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 350W
3. LED: 18颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11CH
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 325*325*350mm
9. 毛重: 9.5KG

IP65



HT-LP-3632

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 108W
3. LED: 36pcs 3W LED, high brightness with a average lifetime as 50,000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 4CH/7CH
7. LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 258*258*300mm
10. G. W: 5.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 108W
3. LED: 36颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25
5. 运行方式: DMX, 主副机, 自走
6. DMX 512控制通道: 4通道/7通道可选
7. 高档LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 258*258*300mm
10. 毛重: 5.5KG

IP65



HT-LP-543

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 200W
3. LED: 54pcs 3W LED, high brightness with a average lifetime as 50,000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/4CH/5CH/6CH/11CH Optional
7. LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 325*325*350mm
10. G. W: 8.9KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 200W
3. LED: 54颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25
5. 运行方式: DMX, 主副机, 自走
6. DMX 512控制通道: 3通道/4通道/5通道/6通道/11通道可选
7. 高档LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 325*325*350mm
10. 毛重: 8.9KG



HT-LP-83T

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 30W
3. LED: 8pcs 3W Tri-RGB LED, high brightness with a average lifetime as 50,000hrs
4. Beam Angle: 25/40
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/6CH Optional
7. Blue LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 200*200*240mm
10. G. W: 2.6KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 30W
3. LED: 8颗3W的3合1大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/40
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 3通道/6通道
7. 高档LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 200*200*240mm
10. 毛重: 2.6KG



HT-LP-1410ZN

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 140W
3. LED: 14pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 10CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 265*265*380mm
9. G. W: 4.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 140W
3. LED: 14颗10W红绿蓝白四合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8° -45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 10通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 265*265*380mm
9. 毛重: 4.6KG



HT-LP-1415ZN

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 210W
3. LED: 14pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8degree-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 11CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 265*265*380mm
9. G. W: 4.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 210W
3. LED: 14颗15W的红绿蓝白琥珀五合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8° -45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 265*265*380mm
9. 毛重: 4.6KG



HT-LP-1418ZN

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 270W
3. LED: 14pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 8° -45°
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 265*265*380mm
9. G. W: 4.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 270W
3. LED: 14颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 8° -45°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 3CH/4CH/5CH/7CH/8CH/9CH/14CH
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 265*265*380mm
9. 毛重: 4.6KG



HT-LP-183

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 60W
3. LED: 18pcs 3W LED, high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 15/25/45
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/6CH Optional
7. Blue LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 200*200*240mm
10. G. W: 2.6KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 60W
3. LED: 18颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25/45
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 3通道/6通道
7. 高档蓝光LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 200*200*240mm
10. 毛重: 2.6KG



HT-LP-1810N

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 180W
3. LED: 18pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 25degree/40degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 8CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 265*265*380mm
9. G. W: 3.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 180W
3. LED: 18颗10W红绿蓝白四合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25°/ 40°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 8通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 265*265*380mm
9. 毛重: 3.6KG



HT-LP-1815N

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 270W
3. LED: 18pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 25degree/40degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 5CH/9CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 265*265*380mm
9. G. W: 3.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 270W
3. LED: 18颗15W的红绿蓝白琥珀五合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25°/40°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 5通道/9通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 265*265*380mm
9. 毛重: 3.6KG



HT-LP-1818N

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 350W
3. LED: 18pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 25degree/40degree
5. Operation Mode: DMX, Master/slave, Auto, Sound active
6. DMX 512 control channel: 11CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe, Zoom
8. Packing Size: 265*265*380mm
9. G. W: 3.6KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 350W
3. LED: 18颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25°/40°
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11CH
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
8. 包装尺寸: 265*265*380mm
9. 毛重: 3.6KG



HT-LP-3631

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 120W
3. LED: 36*3W LED, high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 15/25/60
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/6CH Optional
7. Blue LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 305*290*410mm
10. G. W: 4.9KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 120W
3. LED: 36颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25/60
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 3通道/6通道
7. 高档蓝光LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 305*290*410mm
10. 毛重: 4.9KG



HT-LP-543N

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 200W
3. LED: 54pcs 3W high power LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 8CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 265*265*380mm
9. G. W: 3.6KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 200W
3. LED: 54颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 8通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 265*265*380mm
9. 毛重: 3.6KG



HT-LP-1203N

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 360W
3. LED: 120pcs 3W high power LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 8CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 350*350*400mm
9. G. W: 7.5KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 360W
3. LED: 120颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 15/25
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 8通道
7. 高档LED显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 350*350*400mm
10. 毛重: 7.5KG



HT-LTP-198

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 35W
3. LED: 198pcs 10mm high brightness LED (R:45,G:39,B:39,A:45,W:30), with an average lifetime as 100,000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto, Sound activation
6. DMX 512 control channel: 3CH/5CH/12CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 350*150*300mm
9. G. W: 2.6KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 35W
3. LED: 198颗10mm的LED, 高亮度, 低能耗, 平均寿命达100,000小时
4. 光束角度: 15/25
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 3通道/ 5通道/ 12通道可选
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 350*150*300mm
9. 毛重: 2.6KG



HT-LTP-610Q

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 60W
3. LED: 6pcs 10W RGBW 4IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 25/40
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 4CH/7CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 260*180*230mm
9. G. W: 2.5KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 60W
3. LED: 6颗10W的红绿蓝白四合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/40
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 4通道/ 7通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 260*180*230mm
9. 毛重: 2.5KG



HT-LTP-715F

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 105W
3. LED: 7pcs 15W RGBWA 5IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 25/40
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/5CH/12CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 260*180*230mm
9. G. W: 3.0KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 105W
3. LED: 7颗15W的红绿蓝白琥珀五合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/40
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 3通道/ 5通道/ 12通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 260*180*230mm
9. 毛重: 3.0KG



HT-LTP-1218S

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 220W
3. LED: 12pcs 18W RGBWAUV 6IN1 high power LED, high brightness with an average lifetime as 50,000hrs
4. Beam Angle: 25/40
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 3CH/ 6CH/ 13CH
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 260*180*230mm
9. G. W: 4.0KG

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 220W
3. LED: 12颗18W的红绿蓝白琥珀紫色六合一功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/40
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 3通道/ 6通道/ 13通道
7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
8. 包装尺寸: 260*180*230mm
9. 毛重: 4.0KG



HT-LP-1454

灯光效果/Effect



1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 60W
3. LED: Total 580pcs 10mm LED (each panel with 145pcs 10mm LEDs, 49pcs Red, 48pcs Green, 48pcs Blue), high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 15
5. Operation Mode: DMX, Master/slave, Auto, Sound Activation, Foot Pedal
6. DMX 512 control channel: 4CH/15CH Optional
7. LED Display
8. Functions: 9 Preset colors, 12 Built-in shows, Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 750*480*220mm
10. G. W: 13KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 60W
3. LED: 580颗10mm的LED(每个面板有145颗10mm的LED,红色49颗,绿色48颗,蓝色48颗),高亮度,低能耗,平均寿命达100,000小时
4. 光束角度: 15
5. 控制模式: DMX, 主副机, 自走, 音控, 脚踏板控制器
6. DMX 512通道: 4通道/15通道
7. 高档LED显示屏
8. 其他功能: 9种内置颜色, 12种内置程式, 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 750*480*220mm
10. 毛重: 13KG



HT-LP-934T

灯光效果/Effect



1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 120W
3. LED: Total 36pcs 3W Tri-RGB LED (each panel with 9pcs 3W Tri-RGB LED), high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 25/40
5. Operation Mode: DMX, Master/slave, Auto, Sound Activation, Foot Pedal
6. DMX 512 control channel: 4CH/15CH Optional
7. LED Display
8. Functions: 9 Preset colors, 12 Built-in shows, Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 700*430*280mm
10. G. W: 15KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 120W
3. LED: 36颗3W的3合1大功率LED (每个面板有9颗3W三合一的LED), 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/40
5. 控制模式: DMX, 主副机, 自走, 音控, 脚踏板控制器
6. DMX 512通道: 4通道/15通道
7. 高档LED显示屏
8. 其他功能: 9种内置颜色, 12种内置程式, 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 700*430*280mm
10. 毛重: 15KG

LED洗墙灯系列/LED Wall Wash Light Series



HT-LW-1210M

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 120W
- 3.LED: 12pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 4CH/12CH/20CH/24CH/32CH/48CH/56CH
- 6.Beam angle: 25°
- 7.Functions: Pixel control, Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:5.5KG

- 1.电压: AC100-240V, 50-60HZ
- 2.消耗功率: 120W
- 3.LED: 12颗10W的红绿蓝白四合一灯珠,高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式: DMX, 主副机, 自走
- 5.DMX通道: 4CH/12CH/20CH/24CH/32CH/48CH/56CH
- 6.光束角度: 25°
- 7.功能: 单点控制, 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重: 5.5KG



HT-LW-1810M

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 180W
- 3.LED: 18pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 4CH/12CH/20CH/32CH/44CH/72CH/80CH
- 6.Beam angle: 25°
- 7.Functions: Pixel control, Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:7.5KG

- 1.电压: AC100-240V, 50-60HZ
- 2.消耗功率: 120W
- 3.LED: 18颗10W的红绿蓝白四合一灯珠,高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式: DMX, 主副机, 自走
- 5.DMX通道: 4CH/12CH/20CH/32CH/44CH/72CH/80CH
- 6.光束角度: 25°
- 7.功能: 单点控制, 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重: 7.5KG



HT-LW-810

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 80W
- 3.LED: 8pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 8CH
- 6.Beam angle: 25°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:4.1KG

- 1.电压: AC100-240V, 50-60HZ
- 2.消耗功率: 80W
- 3.LED: 8颗10W的红绿蓝白四合一灯珠,高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式: DMX, 主副机, 自走
- 5.DMX通道: 8CH
- 6.光束角度: 25°
- 7.功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重: 4.1KG




HT-LW-1610

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 160W
- 3.LED: 16pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 8CH
- 6.Beam angle: 25°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:6.8KG

- 1.电压: AC100-240V, 50-60HZ
- 2.消耗功率: 160W
- 3.LED: 16颗10W的红绿蓝白四合一灯珠,高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式: DMX, 主副机, 自走
- 5.DMX通道: 8CH
- 6.光束角度: 25°
- 7.功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重: 6.8KG

IP65



HT-LW-243T

1. Voltage : AC100-240V, 50-60HZ
2. Power Consumption: 72W
3. LED : High brightness 24pcs 3W LEDs, RGB 3IN1
4. Operate Mode : DMX 512, Master/slave, Auto
5. DMX 512 Channels : 6CH
6. Beam Angle: 25°
7. Functions: Color mixing, Color change, Color fade, Strobe
8. Product Size: 1000*50*58mm
9. N.W: 3KG

- 1.电压 : AC100-240V, 50-60HZ
- 2.消耗功率 : 72W
- 3.LED : 24颗3W的红绿蓝三合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX, 主副机, 自走
- 5.DMX通道 : 6CH
- 6.光束角度 : 25°
- 7.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.产品尺寸 : 1000*50*58mm
- 9.静重 : 3KG

IP65



HT-LW-3610

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 360W
- 3.LED: 36pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 8CH
- 6.Beam angle: 8°/25°/40°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:23KG

- 1.电压 : AC100-240V, 50-60HZ
- 2.消耗功率 : 360W
- 3.LED: 36颗10W的红绿蓝白四合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX, 主副机, 自走
- 5.DMX通道 : 8CH
- 6.光束角度 : 8°/25°/40°
- 7.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重 : 23KG


IP65



HT-LW-7210

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 720W
- 3.LED: 72pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 8CH
- 6.Beam angle: 8°/25°/40°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:40KG

- 1.电压 : AC100-240V, 50-60HZ
- 2.消耗功率 : 720W
- 3.LED: 72颗10W的红绿蓝白四合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX, 主副机, 自走
- 5.DMX通道 : 8CH
- 6.光束角度 : 8°/25°/40°
- 7.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重 : 40KG

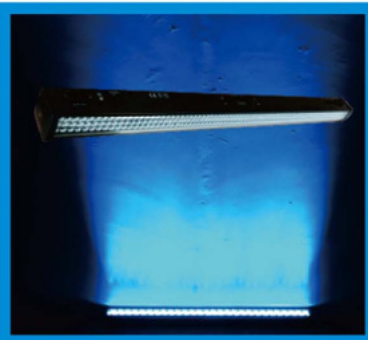

HT-LE-180


- 1.Voltage: AC100-240V, 50/60HZ
- 2.Power Consumption: 30W
- 3.LED: 252pcs 10mm LED (108pcs Red, 72pcs Green, 72pcs Blue), high brightness with a average lifetime as 100,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto, Sound activation
- 5.DMX 512 control channel: 6CH/12CH
- 6.LED Display
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.Packing Size:1070*115*135mm
- 9.G.W:2.5KG

- 1.电压 : AC100-240V, 50/60HZ
- 2.消耗功率 : 30W
- 3.LED : 252颗10mm的LED(108颗红色, 72颗绿色, 72颗蓝色), 高亮度, 低能耗, 平均寿命达100,000小时
- 4.运行方式 : DMX, 主副机, 自走, 声控
- 5.DMX 512通道 : 6通道/12通道可选
- 6.高档LED显示屏
- 7.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.尺寸 : 1070*115*135mm
- 9.毛重 : 2.5KG




HT-LE-163T

灯光效果/Effect

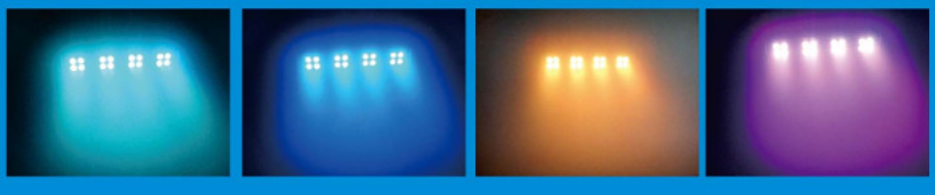


- 1.Voltage: AC100-240V,50/60HZ
- 2.Power Consumption: 60W
- 3.LED: 16pcs 3W Tri-color LED, high brightness with a average lifetime as 50,000hrs
- 4.Beam Angle: 25/60
- 5.Operation Mode: DMX, Master/slave, Auto, Sound activation
- 6.DMX 512 control channel: 5CH/13CH Optional
- 7.Blue LCD Display
- 8.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
- 9.Packing Size: 370*245*150mm
- 10.Weight: 4.3KG

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 60W
3. LED: 16颗3W的3合1大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 25/60
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 5通道/13通道
7. 高档液晶显示屏
8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
9. 包装尺寸: 370*245*150mm
10. 毛重: 4.3KG

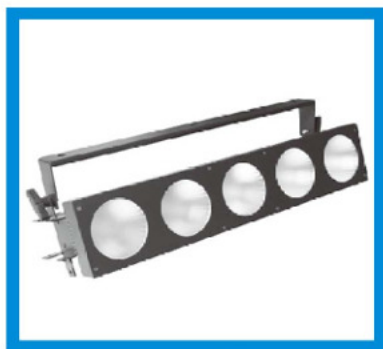

HT-LW-530TM

灯光效果/Effect

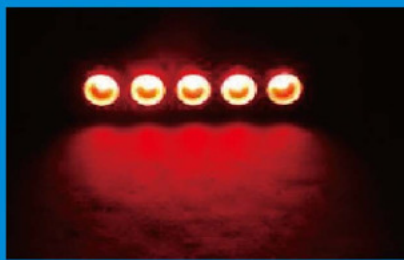

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 150W
- 3.LED: 5pcs 30W RGB 3IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 1CH/3CH/5CH/7CH/15CH/18CH
6. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 7.Product size: 620*150*160mm
- 8.N.W:3.5KG

- 1.电压 : AC100-240V, 50-60HZ
- 2.消耗功率 : 150W
- 3.LED : 5颗30W的红绿蓝三合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX, 主副机, 自走
- 5.DMX通道 : 1CH/3CH/5CH/7CH/15CH/18CH
- 6.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 7.产品尺寸: 620*150*160mm
- 8.静重 : 3.5KG



HT-LW-1810N

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 180W
- 3.LED: 18pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 8CH
- 6.Beam angle: 25°/40°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.N.W:5.0KG

- 1.电压 : AC100-240V, 50-60HZ
- 2.消耗功率 : 180W
- 3.LED : 18颗10W的红绿蓝白四合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX, 主副机, 自走
- 5.DMX通道 : 8CH
- 6.光束角度 : 25°/40°
- 7.功能 : 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重 : 5.0KG



HT-LW-2510M

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 300W
- 3.LED: 25pcs 10W COB RGB 3IN1 LEDs, single color cool white or warm white led is optional, high brightness with an average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 1CH/3CH/5CH/25CH/75CH
6. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 7.Packing size: 750*710*170mm
- 8.G.W:10KG

灯光效果/Effect




- 1.电压：AC100-240V, 50-60HZ
- 2.消耗功率：300W
- 3.LED：25颗10W的红绿蓝三合一灯珠, 单冷白和单暖白可选, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式：DMX, 主副机, 自走
- 5.DMX通道：1CH/3CH/5CH/25CH/75CH
- 6.功能：无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 7.产品尺寸: 750*710*170mm
- 8.毛重：10KG



HT-LW-1630M

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 500W
- 3.LED: 16pcs 30W COB RGB 3IN1 LEDs, single color cool white or warm white led is optional, high brightness with an average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto
- 5.DMX channel: 1CH/3CH/4CH/6CH/16CH/18CH/48CH/49CH/50CH/51CH
6. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 7.Packing size: 750*710*170mm
- 8.G.W:10KG

灯光效果/Effect

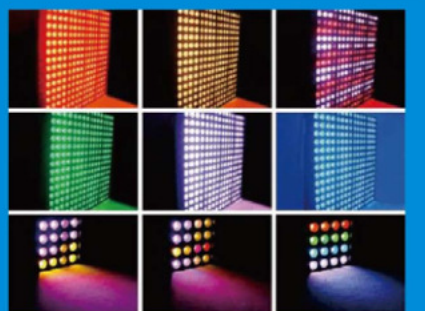

- 1.电压：AC100-240V, 50-60HZ
- 2.消耗功率：500W
- 3.LED：16颗30W的红绿蓝三合一灯珠, 单冷白和单暖白可选, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式：DMX, 主副机, 自走
- 5.DMX通道：1CH/3CH/4CH/6CH/16CH/18CH/48CH/49CH/50CH/51CH
- 6.功能：无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 7.产品尺寸: 750*710*170mm
- 8.毛重：10KG



HT-LW-830T

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Power Consumption: 300W
- 3.LED: 8pcs 30W RGB 3IN1 LEDs, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto, Sound activation
- 5.DMX channel: 1CH/7CH/16CH
- 6.Beam angle: 25°/40°
- 7.Functions: Color mixing, Color change, Color fade, Dimmer, Strobe etc.
- 8.Product size: 473*219*200mm
- 9.N.W:9.5KG

- 1.电压：AC100-240V, 50-60HZ
- 2.消耗功率：300W
- 3.LED：8颗30W的红绿蓝三合一灯珠, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式：DMX, 主副机, 自走, 音控
- 5.DMX通道：1CH/7CH/16CH
- 6.光束角度：25°/40°
- 7.功能：无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 8.静重：9.5KG


LED效果灯/LED Effect Light Series



HT-LE-2R

1. Voltage: AC100-240V, 50-60HZ
2. Power Consumption: 220W
3. Lamp: Philips 2R lamp (8000K, 2000hours)
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 channel: 17CH/21CH
6. Color Wheel: 14colors+open
7. Rotation Gobo Wheel: 17gobo+open
8. Functions: Dimmer, Strobe, 3-facet prism, Prism rotation, Zoom etc.
9. Product size: 358*268*197mm
10. N.W: 7.5KG

1. 电压: AC100-240V, 50/60HZ
2. 消耗功率: 220W
3. 灯泡: Philips 2R lamp (8000K色温, 2000小时)
4. 运行方式: DMX, 主副机, 自走, 声控
5. DMX 512通道: 17通道/21通道
6. 颜色盘: 14种颜色+白光
7. 旋转图案盘: 17种图案+白光
8. 功能: 调光, 频闪, 三棱镜, 棱镜旋转, 光圈等
9. 产品尺寸: 260*230*255mm
10. 静重: 7.5KG

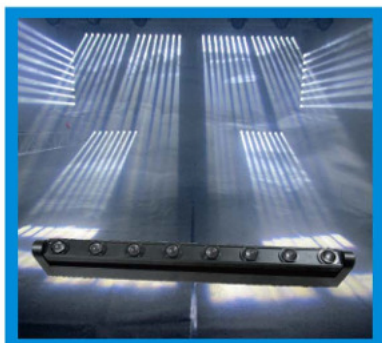

HT-LE-810 W

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 125W
3. LED: 8pcs 10W single color LEDs, high brightness with a average lifetime as 50, 000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 5CH/14CH
6. Prodct Size: 1064*84*180mm
Packing Size: 1165*170*220mm
7. N.W: 7.5kg
G.W: 8.5kg


1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 125W
3. LED: 8颗10W 高亮度单色LED
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX 512通道: 5CH/14CH
6. 产品尺寸: 1064*84*180mm
包装尺寸: 1165*170*220mm
7. 净重: 7.5kg 毛重: 8.5kg



HT-LE-810 C

1. Voltage: AC100-240V, 50-60HZ
2. Power Consumption: 125W
3. LED: 8pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50, 000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 10CH/38CH
6. Prodct Size: 1064*84*180mm
Packing Size: 1165*170*220mm
7. N.W: 7.5kg
G.W: 8.5kg

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 125W
3. LED: 8颗10W 高亮度红绿蓝白四合一LED
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX 512通道: 10CH/38CH
6. 产品尺寸: 1064*84*180mm
包装尺寸: 1165*170*220mm
7. 净重: 7.5kg
毛重: 8.5kg

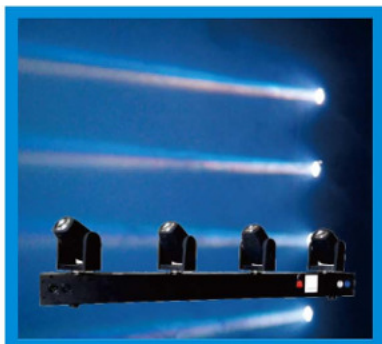

HT-LE-410BC

1. Voltage: AC100-240V, 50-60HZ
2. Power Consumption: 100W
3. LED: 4x10W RGBW 4IN1 LEDs, average life time, 50, 000hours
4. Operation Mode: DMX 512, Master/slave, Auto, Sound
5. DMX channel: 13CH/39CH, every led beam can be controlled seperately
6. Pan: 540degree/ Tilt: 270degree
7. LCD display, easy control
8. Other Functions: Dimmer(0-100%), Strobe(0-18times/s)
9. Product Size: 100x1032x273mm
Packing size: 181x163x313mm
10. Net Weight: 8kg
Gross Weight: 11kg

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 100W
3. LED: 4颗10W红绿蓝白四合一灯珠, 平均寿命50000小时
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX通道: 13CH/39CH, 每个单头都可以单独控制
6. X轴: 540度/ Y轴: 270度
7. LCD显示板, 人性化易控制
8. 其他功能: 调光(0-100%), 频闪(0-18times/s)
9. 产品尺寸: 100x1032x273mm
包装尺寸: 181x163x313mm
10. 净重: 8kg
毛重: 11kg



HT-LE-8102W

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 125W
3. LED: 8pcs 10W single color LEDs, high brightness with a average lifetime as 50, 000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 5CH/14CH
6. Product Size: 564*170*200mm
Packing Size: 665*270*280mm
7. N.W:7.5kg
G.W:8.5kg

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 125W
3. LED: 8颗10W 高亮度单色LED
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX 512通道: 5CH/14CH
6. 产品尺寸: 564*170*200mm
包装尺寸: 665*270*280mm
7. 净重: 7.5kg
毛重: 8.5kg



HT-LE-8102C

1. Voltage: AC100-240V, 50-60HZ
2. Power Consumption: 125W
3. LED: 8pcs 10W RGBW 4IN1 LEDs, high brightness with a average lifetime as 50, 000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 10/38CH
6. Product Size: 564*170*200mm
Packing Size: 665*270*280mm
7. N.W:7.5kg
G.W:8.5kg

1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 125W
3. LED: 8颗10W 高亮度红绿蓝白四合一LED
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX 512通道: 10CH/38CH
6. 产品尺寸: 564*170*200mm
包装尺寸: 665*270*280mm
7. 净重: 7.5kg
毛重: 8.5kg



HT-LE-336T

1. Voltage: AC100-240V, 50/60HZ
2. Power Consumption: 30W
3. LED: 3pcs 3W Tri-RGB LED, high brightness with a average lifetime as 50,000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 4CH
6. Dip Switch
7. Functions: Rotating moonflower, Strobe etc.
8. Packing Size: 465*290*550mm (for 4pcs)
9. G. W:12.5kg (for 4pcs)

1. 电压: AC100-240V, 50/60HZ
2. 消耗功率: 30W
3. LED: 3颗3W的3合1大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 运行方式: DMX, 主副机, 自走, 声控
5. DMX 512通道: 3通道/64通道
6. 拨码开关
7. 功能: 旋转月亮花盘, 频闪等
8. 包装尺寸: 465*290*550mm (4台)
9. 毛重: 12.5KG (4台)



HT-ESL

1. Voltage: AC100-240V, 50-60HZ
2. Power consumption: 66W
3. Light source:
Green Laser: 50mW 532nm wavelength
Red Laser: 100mW 650nm Wavelength
LED: 1/RED 1/GREEN 1/BLUE 1/WHITE 1/ AMBER 3W
LED Power: 8/WHITE 1W
4. Operation Mode: Auto, Sound activated
5. Packing Size: 345*315*260mm
6. G. W: 4.5 kg


1. 电压: AC100-240V, 50-60HZ
2. 消耗功率: 66W
3. 光源:
绿色激光: 50mW 532nm
红色激光: 100mW 650nm
LED: 1/红色, 1/绿色, 1/蓝色, 1/白色, 1/琥珀色3W灯珠
LED: 8/白色1W灯珠
4. 运行模式: 自走, 音控
5. 包装尺寸: 345*315*260mm
6. 毛重: 4.5 kg



HT-LE-10B2

- 1.Voltage: AC100-240V,50/60HZ
- 2.Power Consumption: 30W
- 3.LED: 3*3W LED (1pc Red, 1pc Green, 1pc Blue), high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto, Sound activation
- 5.DMX 512 Channel: 7CH
- 6.Dimmer:0-100%
- 7.Functions: Built-in patterns, Strobe etc.
- 8.Packing Size:365*330*305mm
- 9.G.W:3.8kg


- 1.电压 : AC100-240V,50/60HZ
- 2.消耗功率 : 30W
- 3.LED : 3*3W高亮度LED(红 , 绿 , 蓝各一颗) , 平均寿命5万小时
- 4.运行方式 : DMX , 主副机 , 自走 , 声控
- 5.DMX 512通道 : 7通道
- 6.调光 : 0 - 100%
- 7.功能 : 内置花样 , 频闪等
- 8.包装尺寸 : 365*330*305mm
- 9.毛重 : 3.8kg

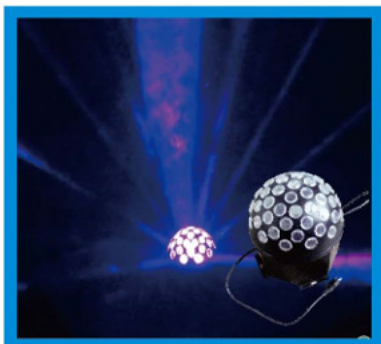

HT-LE-MB5

- 1.Voltage: AC100-240V, 50/60HZ
- 2.Power Consumption: 15W
- 3.LED: 1pc 3W Tri-RGB LED, high brightness with a average lifetime as 50,000hrs
- 4.Operation Mode: DMX, Master/slave, Auto, Sound activation
- 5.DMX 512 channel: 6CH
- 6.Functions: Rotating, Strobe etc.
- 7.Packing Size: 260*230*255mm
- 8.G.W: 2.2KG

- 1.电压 : AC100-240V, 50/60HZ
- 2.消耗功率 : 15W
- 3.LED : 1颗3W的3合1大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.运行方式 : DMX , 主副机 , 自走 , 声控
- 5.DMX 512通道 : 6通道
- 6.功能 : 旋转 , 频闪等
- 7.包装尺寸 : 260*230*255mm
- 8.毛重 : 2.2KG

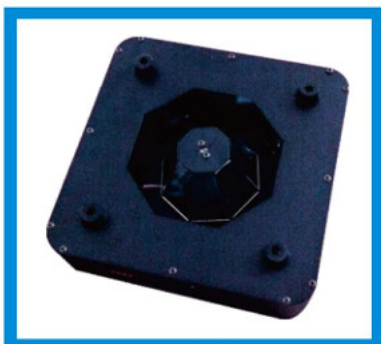

HT-LE-410C

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 60W
3. LED: 4pcs 10W RGBW 4IN1 LED, high brightness with a average lifetime as 50,000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 21CH
6. Dimmer: 0-100%
7. Function: Built-in programs, Strobe etc
8. Prodct Size: 350*350*185mm
9. N.W:4.5kg

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 60W
3. LED: 4颗10W 高亮度四合一LED
4. 运行模式: DMX, 主副机, 自走, 音控
5. DMX 512通道: 21CH
6. 调光: 0-100%
7. 其他功能: Built-in programs, Strobe etc
8. 产品尺寸: 350*350*185mm
9. 净重: 4.5kg



HT-Strobe-3000

1. Voltage: AC110V/220-240V,50/60HZ
2. Power Consumption: 3000W
3. Lamp: 3000W strobe lamp
4. DMX 512 Channels: 4CH
5. Function: DMX operation mode, Strobe speed adjustable
6. Packing Size: 530*200*310mm
7. G.W: 6.8KG

- 1.电压 : AC220V,50/60HZ
- 2.消耗功率 : 3000W
- 3.灯泡 : 3000W频闪泡
- 4.DMX 512通道: 4通道
- 5.功能 : DMX控制频闪 , 频闪速度可调
- 6.产品尺寸: 530*200*310mm
- 7.毛重: 6.8KG

追光灯系列/Follow Spot Light Series



HT-FS-5R W
HT-FS-7R W

1. Voltage: AC100-240V, 50-60HZ
2. Light Source: 5R 189W / 7R 230W
3. Power Consumption: 350W / 450W
4. Color: White
5. Function: manual focus, iris, strobe
6. Packing Size: 605*290*240mm
7. Gross Weight: 10KG
8. Features: small size, light weight, high brightness.

1. 电压: AC100-240V, 50-60HZ
2. 灯泡: 5R 189W / 7R 230W
3. 消耗功率: 350W / 450W
4. 颜色: 白色
5. 功能: 手动调焦, 光圈, 频闪
6. 包装尺寸: 605*290*240mm
7. 毛重: 10KG
8. 特点: 小尺寸, 轻重量, 高亮度



HT-FS-5R C
HT-FS-7R C

1. Voltage: AC100-240V, 50-60HZ
2. Light Source: 5R 189W / 7R 230W
3. Power Consumption: 350W / 450W
4. Color: White, Red, Green, Blue, Yellow
5. Function: electronic focus, iris, strobe
6. Packing Size: 605*290*240mm
7. Gross Weight: 12KG
8. Features: small size, light weight, high brightness.

1. 电压: AC100-240V, 50-60HZ
2. 灯泡: 5R 189W / 7R 230W
3. 消耗功率: 350W / 450W
4. 颜色: 白色, 红色, 绿色, 蓝色, 黄色
5. 功能: 调焦, 光圈, 频闪
6. 包装尺寸: 605*290*240mm
7. 毛重: 12KG
8. 特点: 小尺寸, 轻重量, 高亮度



HT-FS-15R C

1. Voltage: AC100-240V, 50-60HZ
2. Light Source: 15R 330W
3. Power Consumption: 550W
4. Color: White, Red, Green, Blue, Yellow
5. Function: focus, iris, strobe
6. Packing Size: 730*350*280mm
7. Gross Weight: 18KG
8. Features: small size, light weight, high brightness.

1. 电压: AC100-240V, 50-60HZ
2. 灯泡: 15R 330W
3. 消耗功率: 550W
4. 颜色: 白色, 红色, 绿色, 蓝色, 黄色
5. 功能: 调焦, 光圈, 频闪
6. 包装尺寸: 730*350*280mm
7. 毛重: 18KG
8. 特点: 小尺寸, 轻重量, 高亮度



HT-FS-575


- 1.Voltage: AC110V/220-240V,50/60HZ
- 2.Fuse: 7A
- 3.Power consumption: 750W
- 4.Lamp: HMI 575
- 5.Color Wheel: 4 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 50Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1170*400*270mm
- 10.G.W: 32.5kg

- 1.电压 : AC110V/220-240V,50/60HZ
- 2.保险 : 7A
- 3.消耗功率 : 750W
- 4.灯泡 : HMI 575
- 5.颜色盘: 4种颜色+白光
- 6.光束角度15度
- 7.投射距离50米
- 8.功能: 频闪(1-10次/秒),光斑大小调节等
- 9.尺寸: 1170*400*270mm
- 10.重量: 32.5kg



HT-FS-1200A

灯光效果/Effect

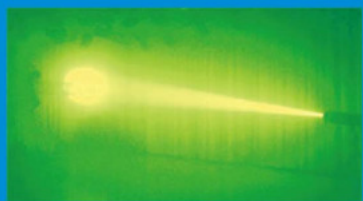

- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 15A
- 3.Power consumption: 1500W
- 4.Lamp: HMI 1200W
- 5.Color Wheel: 4 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 100Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1170*400*270mm
- 10.G.W: 37kg

- 1.电压 : AC110V/220-240V,50/60HZ
- 2.保险 : 15A
- 3.消耗功率 : 1500W
- 4.灯泡 : HMI 1200W
- 5.颜色盘: 4种颜色+白光
- 6.光束角度15度
- 7.投射距离100米
- 8.功能: 频闪(1-10次/秒),光斑大小调节等
- 9.尺寸: 1170*400*270mm
- 10.重量: 37kg



HT-FS-1200B

灯光效果/Effect



- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 15A
- 3.Power consumption: 1500W
- 4.Lamp: HMI 1200W
- 5.Color Wheel: 4 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 100Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1170*400*270mm + 360*250*230mm
- 10.G.W: 41kg

- 1.电压 : AC110V/220-240V,50/60HZ
- 2.保险 : 15A
- 3.消耗功率 : 1500W
- 4.灯泡 : HMI 1200W
- 5.颜色盘: 4种颜色+白光
- 6.光束角度15度
- 7.投射距离100米
- 8.功能: 频闪(1-10次/秒),光斑大小调节等
- 9.包装尺寸: 1170*400*270mm + 360*250*230mm
- 10.毛重: 41kg



HT-FS-1200D

灯光效果/Effect



- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 15A
- 3.Power consumption: 1500W
- 4.Lamp: HMI 1200W
- 5.DMX Channel: 4CH
- 6.Color Wheel: 4 colors + open
- 7.Color Filter: 3200k + 6400k
- 8.Beam Angle: 15°
- 9.Beam Distance: 100Meters
- 10.Functions: Strobe(1-10times/s), Iris etc
- 11.Packing Size: 1170*400*200mm + 360*250*230mm
- 12.G.W: 41kg

- 1.电压 : AC110V/220-240V,50/60HZ
- 2.保险 : 15A
- 3.消耗功率 : 1500W
- 4.灯泡 : HMI 1200W
- 5.DMX512通道 : 4CH
- 6.颜色盘: 4种颜色+白光
- 7.色温片 : 3200k + 6400k
- 8.光束角度15度
- 9.投射距离100米
- 10.功能: 频闪(1-10次/秒),光斑大小调节等
- 11.尺寸: 1170*400*270mm + 360*250*230mm
- 12.重量: 41kg



HT-FS-2500A

灯光效果/Effect



- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 20A
- 3.Power consumption: 2800W
- 4.Lamp: HMI 2500W
- 5.Color Wheel: 4 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 200Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1170*400*270mm + 430*390*230mm
- 10.G.W: 51kg

- 1.电压：AC110V/220-240V,50/60HZ
- 2.保险：20A
- 3.消耗功率：2800W
- 4.灯泡：HMI 2500W
- 5.颜色盘：4种颜色+白光
- 6.光束角度15度
- 7.投射距离200米
- 8.功能：频闪(1-10次/秒),光斑大小调节等
- 9.包装尺寸：1170*400*270mm + 430*390*230mm
- 10.毛重：51kg



HT-FS-2500B

灯光效果/Effect




- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 20A
- 3.Power consumption: 3000W
- 4.Lamp: SXB2500W
- 5.Color Plate: 6 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 300Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1450*400*480mm + 430*490*390mm
- 10.G.W: 61kg

- 1.电压：AC110V/220-240V,50/60HZ
- 2.保险：20A
- 3.消耗功率：3000W
- 4.灯泡：SXB2500W
- 5.颜色片：6种颜色+白光
- 6.光束角度15度
- 7.投射距离300米
- 8.功能：频闪(1-10次/秒),光斑大小调节等
- 9.包装尺寸：1450*400*480mm + 430*490*390mm
- 10.毛重：61kg



HT-FS-2500D

灯光效果/Effect

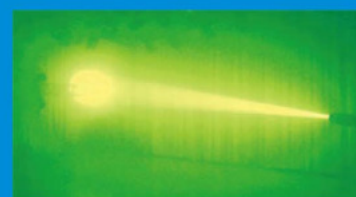

- 1.Voltage: AC110V/220-240V, 50/60HZ
- 2.Fuse: 20A
- 3.Power consumption: 2800W
- 4.Lamp: HMI 2500W
- 5.DMX Channel: 4CH
- 6.Color Wheel: 4 colors + open
- 7.Color Filter: 3200k + 6400k
- 8.Beam Angle: 15°
- 9.Beam Distance: 200Meters
- 10.Functions: Strobe(1-10times/s), Iris etc
- 11.Packing Size: 1170*400*270mm + 430*390*230mm
- 12.G.W: 51kg

- 1.电压：AC110V/220-240V,50/60HZ
- 2.保险：20A
- 3.消耗功率：2800W
- 4.灯泡：HMI 2500W
- 5.DMX512通道：4CH
- 6.颜色盘：4种颜色+白光
- 7.色温片：3200k + 6400k
- 8.光束角度15度
- 9.投射距离200米
- 10.功能：频闪(1-10次/秒),光斑大小调节等
- 11.尺寸：1170*400*270mm + 430*390*230mm
- 12.重量：51kg



HT-FS-4000

- 1.Voltage: AC110V/220-240V,50/60HZ
- 2.Fuse: 35A
- 3.Power consumption: 4500W
- 4.Lamp: SXB4000W
- 5.Color Plate: 4 colors + open
- 6.Beam Angle: 15°
- 7.Beam Distance: 300Meters
- 8.Functions: Strobe(1-10times/s), Iris etc
- 9.Packing Size: 1450*400*480mm + 430*490*390mm
- 10.G.W: 54kg

- 1.电压：AC110V/220-240V,50/60HZ
- 2.保险：35A
- 3.消耗功率：4500W
- 4.灯泡：SXB4000W
- 5.颜色片：4种颜色+白光
- 6.光束角度15度
- 7.投射距离300米
- 8.功能：频闪(1-10次/秒),光斑大小调节等
- 9.包装尺寸：1450*400*480mm + 430*490*390mm
- 10.毛重：54kg

控制台系列/Controllers



Avolite Tiger Touch

Built-in 15.4 inch bright touch screen, and can be expanded to a 17 inch touch screen
Support Art-Net expansion, a total of 12 DMX interface support -6144 channels
20 scenes and running lights
More than 1000 virtual reproduction
Fully compatible with performance file of Pearl expert
10 macro button and macro library
Support CITP multimedia material agreement
More than 1000 world mainstream lighting library, and built-in Personality Builder lighting library write software
Upgrade the TITAN operating system for free
Built-in free Visualiser stage simulation software
Retain human interface of Pearl
N.W: 13kg
G.W: 30kg (flight case packing)
Size: 750*610*300mm

内置15.4寸高亮触摸屏，并可扩展一个17寸触摸屏
支持Art-Net扩展，共支持12个DMX接口-6144通道
20个场景及跑灯主控
超过1000个的虚拟重放
与珍珠专家演出文件完全兼容
10个宏按钮和宏库
支持CITP多媒体素材协议
超过1000个世界主流灯具灯库，并内置Personality Builder灯库写入软件
免费的TITAN操作系统升级
内置免费Visualiser舞台模拟软件
保留了如同大众喜爱和熟悉的“珍珠”的人性化界面
重量：13kg（不带包装），30kg（带航空箱）
尺寸：750 x 610 x 300 mm



Avolite Pearl 2010

- 1.Voltage: AC100-240V,50/60HZ
- 2.Can use the USB connected to a computer to load and save performance
- 3.DMX512/1990 2048 channels
- 4.4 DMX OUT XLR socket
- 5.Can control at most 240 computer lights, 240 dimmer control channels
- 6.Big Blue LCD Display, 320'x240'
- 7.15 master control playback and memory to run 450 programs
- 8.Built-in lighting library for more than 200 kinds of lightings
- 9.Pattern generator (Shape Generator) function can be immediately generated styles and effects
- 10.N.W : 21.4kg
- 11.G.W : 43kg
- 12.Product Size : 735*595*150mm
- 13.Packing Size : 810*68*28mm

- 1.电压：AC100-240V,50/60HZ
- 2.USB存储器，可以有效保存现场数据
- 3.DMX512/1990标准，2048个DMX控制通道
- 4.四个光电隔离独立驱动信号输出端口，可抗2000Vrms电气冲击
- 5.可以控制40通道最多240台电脑灯和240路调光
- 6.320x240大屏幕显示所有操作和变化及输出
- 7.可以存储450个程序
- 8.内置灯库200多个
- 9.机内固化多种特效程序，有效支持现场变幻特效
- 10.净重：21.4kg
- 11.毛重：43kg
- 12.产品尺寸：735*595*150mm
- 13.包装尺寸：810*68*28mm



Polit 2000

- 1.Voltage: AC110V/220-240V,50/60HZ
- 2.At most can control 40 groups of lightings with at most 36Channels
- 3.Blue LCD Display
- 4.Can store 40 built-in programs
- 5.MIDI Input / Output
- 6.Can be sound activation

- 1.电压 : AC220V,50/60HZ
- 2.最多可控制40组灯, 灯具最多可有36个通道。
- 3.高档蓝白光液晶显示屏
- 4.最多可存储40个电脑灯程序,跑灯程序,预置和场景
- 5.MIDI输入/输出
- 6.内置麦克风可音频输入



HT-Controller-2024

- 1.DMX512/1990 Standard
- 2.504 channels
- 3.LCD display with backlight
- 4.Up to 20 scanners may be connected with a maximum of 24 channels
- 5.960 chase steps
- 6.Range of cross time: 0.1s-25.5s
- 7.Range of speed time: 0.1s-25.5s
- 8.Each chase speed and cross time can be saved automatic
- 9.128 K high capacity memory card
- 10.The Data auto-saves
- 11.DMX signal output connector: XLR-D3F
- 12.Power supply: DC9V 10 00mA
- 13.Size: 485mmX250mmX91mm
- 14.Net Weight: 5KG

- 1.DMX512/1990信号输出
- 2.504个控制通道
- 3.LCD液晶屏幕带LED指示灯
- 4.可同时控制20台24通道电脑灯+24调光通道
- 5.共960个电脑灯走灯程序步
- 6.0.1-25.5秒的场景渐变时间
- 7.0.1-25.5秒的走灯速度
- 8.各程序速度和渐变值自动记忆
- 9.128K大容量记忆
- 10.重启自动运行程序
- 11.DMX信号输出连接器 : XLR-D3F
- 12.电源输入 : DC9V 10 00mA
- 13.外形尺寸 : 485mmX250mmX91mm
- 14.重量 : 5KG



HT-Controller-240

- 1.Voltage: AC110-240V,50-60HZ
- 2.At most can control 12 groups of lightings with at most 16Channels
- 3.Blue LCD Display
- 4.Can store 12 built-in programs, each program with 40scenes
- 5.Product Size: 490*245x110mm
- 6.Packing Size: 530*320*150mm
- 7.N.W: 4.3KG
- 8.G.W: 5.0KG

- 1.电压 : AC110-240V,50-60HZ
- 2.最多可控制12组灯, 灯具最多可有16个通道。
- 3.高档蓝白光液晶显示屏
- 4.最多可存储12个电脑灯程序,跑灯程序,每个场景最多有40步
- 5.产品尺寸 : 490*245x110mm
- 6.包装尺寸 : 530*320*150mm
- 7.净重 : 4.3KG
- 8.毛重 : 5.0KG



HT-Controller-192

- 1.Voltage: AC110-240V,50-60HZ
- 2.Total 192channels, at most can control 12 groups of lightings with at most 16Channels
- 3.LED Display
- 4.30banks, each bank can store 8scenes, total 240scenes
- 5.6 built-in programs
- 6.8 faders with two pages
- 7.MIDI compatible
- 8.Polarity selector
- 9.3-space 19" rack or desk top use
- 10.Fine plastic frame available per request
- 11.Packing Size: 482*1321*73mm
- 12.N.W: 4.5KG

- 1.电压 : AC110-240V,50-60HZ
- 2.共192个通道, 最多可控制12组灯, 灯具最多可有16个通道。
- 3.高档LED显示屏
- 4.30个BANK, 每个有8个景, 共240景
- 5.6个程序, 共240景
- 6.8个推子, 可翻页
- 7.MIDI输入
- 8.极性选择开关
- 9.可装于19机柜, 可置于台面使用
- 10.精制橡胶漆塑料框备选
- 11.包装尺寸 : 482*1321*73mm
- 12.毛重 : 4.5KG



广州市皓腾灯光有限公司
Idealight Industrial Co., Limited

造一流产品 创知名品牌

Do your idea light! What idea you have, what light we have. That's it!

广州市皓腾灯光有限公司
Idealight Industrial Co., Limited

Add: No. 9, Hua Xing Zhong Road, Huaxing
Industrial Park, Xinhua Town, Huadu
District, Guangzhou, China

Postcode: 510800

Tel: +86-(0)20-36815648

Fax: +86-(0)20-36815248

E-mail: sales@idealight.com.cn

Website: www.idealight.com.cn